MONITORING CONTROL SYSTEM, MONITORING CONTROL METHOD AND CONTROL PROGRAM FOR DEVICE ON CONTROLLED SIDE

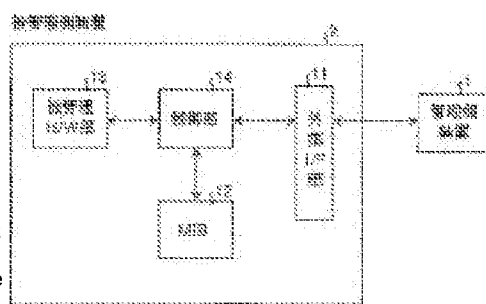|	
Publication number:	JP2002290403 (A)
Publication date:	2002-10-04
Inventor(s):	YAMAZAKI TAKAHIKO +
Applicant(s):	MITSUBISHI ELECTRIC CORP +
Classification:	
- international:	*G06F13/00; G06F13/38; H04L12/24; H04L12/28;* *G06F13/00; G06F13/38; H04L12/24; H04L12/28;* (IPC1-7): G06F13/00; H04L12/24; H04L12/28
- European:	G06F13/38A2
Application number:	JP20010085831 20010323
Priority number(s):	JP20010085831 20010323

Also published as:

- EP1372078　(A1)
- US2004128114　(A1)
- WO02077830　(A1)
- CN1494682　(A)
- CN1265299　(C)

Abstract of **JP 2002290403　(A)**

PROBLEM TO BE SOLVED: To provide a monitoring control system capable of determining the cause for a blocking state from the contents of trap (an autonomous message). SOLUTION: In a monitoring control system of this invention employing SNMP(simple network management protocol), when a device 1 of the monitoring side sets a specific hardware in a device 2 on the monitored side to a blocking state, the device 1 transmits a SetRequest including a blocking request to the device 2 on the monitored side. A control unit 14 in the device 2 on the monitored side, which receives the blocking request, starts the blocking processing for the designated specific hardware, and changes items for the relevant hardware blocking in MIB(Management Information Base) into a blocking state, and returns a GetRequest including the result of the change to the device 1 on the monitoring side. Then, the control unit 14 generates Trap including request ID indicating the blocking request and transmit it to the device 1 on the monitoring side, at the stage of blocking processing completion.